



IJITCE

ISSN 2347- 3657

International Journal of Information Technology & Computer Engineering

www.ijitce.com



Email : ijitce.editor@gmail.com or editor@ijitce.com

Intelligent Controller-Based Design of Intelligent Lighting and Security Systems

¹K. Bhaskar Mutyalu, ²Ch. Surya Babu

³Boddu Pavan Kumar, ⁴Vinod Kumar, ⁵Boni Surendra Naidu,

¹Professor, Department of Mechanical Engineering, Rajamahendri Institute of Engineering & Technology.

²Professor, Department of ECE, Rajamahendri Institute of Engineering & Technology.

^{3,4,5}Student, Department of ECE, Rajamahendri Institute of Engineering & Technology.

ABSTRACT:


Intelligent lighting and security systems are vital components of contemporary smart buildings and houses for minimizing energy usage and guaranteeing safety. To provide a safe and automated setting, the suggested system incorporates essential parts such as photoreceptor (PIR) sensors, light-dependent resistors (LDRs), lights, and buzzers. The system may activate or deactivate lights based on the presence of humans, thanks to the PIR sensor, which helps to reduce power usage. To make energy use more efficient, the LDR helps control the brightness of the lights in response to the amount of light outside. When the buzzer detects an intrusion or potentially dangerous event like a gas leak or fire, it will sound an alarm. A low-cost and efficient option for contemporary smart buildings and houses, this system is built around an Arduino controller that automates the reactions to sensor inputs.

EMBEDDED SYSTEMS

A computer system that is purpose-built to carry out a single or limited set of tasks, often under the restrictions of real-time computing, is known as an embedded system. As with other physical and mechanical components, it is often integrated into a whole device. A personal computer or other general-purpose computer, on the other hand, may be programmed to do a wide variety of functions. These days, many of the everyday items we use rely on embedded systems to function. Design engineers may improve the embedded system to decrease product size and cost while boosting reliability and performance since it is devoted to certain functions. Because of their mass production, certain embedded systems are able to take advantage of cost savings. From small, handheld gadgets like digital watches and MP3 players to massive, permanently installed systems like those managing nuclear power plants, traffic lights, and industrial controls are all examples of physically embedded systems. From simple systems using a single microcontroller chip to complex systems housing several modules, peripherals, and networks in a massive chassis or


enclosure, complexity may range greatly. The phrase "embedded system" lacks a precise definition because the majority of systems have programmability in some form. While they share some components with embedded systems, such as operating systems and microprocessors, handheld computers are not technically embedded systems as they enable the loading of multiple programs and the connection of peripherals. Computer hardware and software, either fixed in capability or programmable, particularly intended for a certain sort of application device—this is what's called an embedded system. Embedded systems may be found in a wide variety of objects, including but not limited to: vehicles, medical devices, cameras, home appliances, aircraft, vending machines, toys, and, of course, cellular phones and personal digital assistants. A programming interface is given to programmable embedded devices, and programming for embedded systems is a niche field in and of itself. Embedded Java and Windows XP Embedded are two examples of embedded-specific operating systems and language platforms. On the other hand, certain budget consumer goods include integrated application and operating system components, employ very cheap microprocessors, and have limited storage space. Instead of being loaded into RAM (random access memory), as applications on personal computers are, in this situation the program is written permanently into the system's memory.

CHARACTERISTIC OF EMBEDDED SYSTEM



APPLICATIONS OF EMBEDDED SYSTEMS

Here, in the Embedded World, we are living. The smooth operation of the various embedded goods that surround you is crucial to your day-to-day existence. In your living room, you have a TV, radio, and CD player; in your kitchen, you have a washing machine or microwave oven; and at your office, you have card readers, access controllers, and palm devices that let you do a lot. In addition to all of this, your automobile has a plethora of built-in controls that handle functions between the bumpers, most of which you probably don't give a second thought to.



MICROCONTROLLER VERSUS MICROPROCESSOR

When comparing microprocessors and microcontrollers, what are the key differences? Any general-purpose microprocessor, such as an 8086, 80286, 80386, 80486, or a Pentium from Intel, or a 680X0 from Motorola, etc., is considered a microprocessor. In addition to lacking on-chip I/O ports, these microprocessors also lack random-access memory (RAM). Because of this, they are often called general-purpose microprocessors. Designing a working system around a general-purpose CPU like the 68040 or Pentium requires the addition of extra components like as RAM, ROM, I/O ports, and timers. Though these systems are more costly and cumbersome due to the inclusion of external RAM, ROM, and I/O ports, they provide the benefit of being versatile in that the designer may choose the quantity of RAM, ROM, and I/O ports required for the work at hand. Microcontrollers are an exception to this rule. On a single chip, you'll find a microprocessor, random access memory (RAM), read/write (ROM), input/output (I/O) ports, and a timer in a microcontroller. So, since the CPU, random access memory (RAM), read/write memory (ROM), input/output (I/O) ports, and timer are all integrated into a single chip, the designer is unable to include

any more memory, I/O ports, or timer into the product. Because of its set quantity of on-chip ROM, RAM, and number of I/O ports, microcontrollers are perfect for many applications where space and cost are important considerations. It is not necessary to have a 486 or even an 8086 CPU for many applications; for instance, a TV remote control. Typically, these programs will need some kind of input/output function in order to read signals and toggle bits.

INTRODUCTION

Modern construction practices can exclude essential features like adequate lighting, ventilation, and security. Both too much and too little light and heat can have negative impacts on the environment. When lights within a facility are turned on in response to the presence of people, it can help reduce power use. The majority of energy savings are also attained by controlling the air conditioners in accordance with the weather. Near the door is a photoelectric sensor that can detect when someone is there. The room lights are automatically switched on once this sensor picks up human activity. In addition to this, individuals may use their mobile phones to turn on and off the electric lights. In the event of a fire or an intrusion, an autonomous robotic vehicle has been programmed to sound an alert [1]-[2].

LITERATURE SURVEY

- Environmental impacts from too much or too little light and heat are a result of the fact that most modern buildings do not have enough lighting, ventilation, or security systems.
- Energy-saving lighting and HVAC systems may be programmed to respond to human presence and outside factors.
- Intruders and fire dangers can be detected and reported by autonomous robotic systems.

EXISTING SYSTEM

Inefficient energy use and delayed reactions to security threats are results of traditional lighting and security systems' heavy reliance on human control. Traditional lighting systems waste energy by staying on even when no one is in the room. Similarly, in real-time situations, the efficacy of most security systems is reduced since they require human interaction and monitoring. There is some automation out there utilizing basic motion detectors, but it doesn't incorporate additional smart components like light-dependent resistors (LDRs) for lighting optimization and security alarm buzzers. In addition, the ability to remotely monitor

and automate is severely limited in older systems that do not use IoT-based control.

PROPOSED MODEL

An automated and responsive environment is created by integrating PIR sensors, LDRs, lights, and buzzers in the proposed smart lighting and security system. To save power, the PIR sensor waits for motion to be detected before turning on the lights. To provide the best possible brightness with no light loss, the LDR continuously changes the light's intensity in response to changes in the surrounding light. In the event of a security breach or an emergency, such as a gas leak or fire, the buzzer will sound an alarm to notify the occupants. A microcontroller based on Arduino handles all of the system's processing of sensor input and automation of responses. Users may also manage the system and get notifications on their cellphones thanks to the system's capability for remote monitoring through IoT connectivity. Security, energy usage, and general efficiency are all improved by including these smart components into the suggested system.

BLOCK DIAGRAM




Figure 1: Block Diagram

Microcontroller:

A tiny controller, or microcontroller, as the name implies. Often used as a processing or controlling unit, they are similar to single-chip computers. For instance, microcontrollers that do decoding and other regulating operations are likely integrated into the control you are using. They find further use in vehicles, home appliances, microwaves, toys, and any other area requiring automation.

Arduino Uno Microcontroller:

One such microcontroller board is the Arduino Uno, which uses the Atmega328 (datasheet). It has a 16 MHz crystal oscillator, 6

analogue inputs, 14 digital input/output pins (6 of which may be used as PWM outputs), a power connector, an ICSP header, a reset button, and a USB connection. All you need is a USB cable, an AC-to-DC converter, or a battery to get it going; it comes with everything you need to support the microcontroller.

A key difference between the Uno and all previous boards is the absence of the FTDI USB-to-serial driver chip. Rather of that, it has an Atmega8U2 that has been configured to convert USB to serial. To celebrate the impending release of Arduino 1.0, the name "Uno"—which means "One" in Italian—has been chosen. The Uno and Arduino version 1.0 will serve as the foundational versions for future Arduino releases. For a comparison with prior generations, see the index of Arduino boards. The Uno is the newest in a series of USB Arduino boards and the standard model for the Arduino platform.

ARDUINO UNO BOARD:

One board that uses the Atmega328 microprocessor is the Arduino Uno. A 16 MHz ceramic resonator, 6 analog inputs, 14 digital I/O pins (including 6 PWM outputs), 1 USB port, 1 power connector, 1 ICSP header, and 1 reset button are all part of it. All you need is a USB cable, an AC-to-DC converter, or a battery to get it going; it comes with everything you need to support the microcontroller.

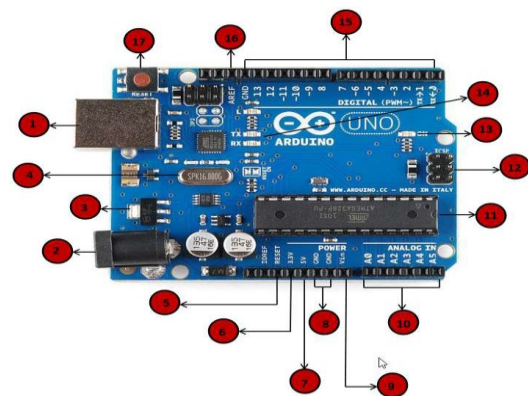




Figure 3: power supply

Diodes:

Only one path of electrical current may pass through a diode. Current may flow in either direction, as shown by the arrow in the circuit symbol. Originally termed valves, diodes are essentially an electrically enhanced version of the mechanical component.




Figure 4: Diode Symbol

One kind of electrical component that restricts current flow is the diode. A voltage loss of around 0.7V will be the sole influence on the signal when the diode is "forward-biased" in this way. No current will flow through a diode that is "reverse-biased" when the current is applied in the other direction.

Rectifier

A rectifier's job is to change the phase of an alternating current (AC) waveform so that it appears as a direct current (DC) waveform. Both "half-wave" and "full-wave" rectifiers are used for rectification. Diodes are used in both devices to convert AC current into DC current. The Half-Wave Rectifiable
The graphic shows that the half-wave rectifier is the simplest rectifier type since it only employs one diode.



Figure 5: Half Wave Rectifier

LIQUID CRYSTAL DISPLAY

An array of color or monochrome pixels arranged in front of a light source or reflector makes up a liquid crystal display (LCD), a thin, flat display device. Two polarizing filters, with their polarity axes perpendicular to one other, and a column of liquid crystal molecules hanging between two transparent electrodes make up each pixel. Light would not be able to travel through them if the liquid crystals weren't interposed. To make light flow through two filters, the liquid crystal changes the polarization of the light entering the first filter.


A program's ability to communicate with the outside world depends on its input and output devices, which in turn rely on human communication. An LCD display is a typical accessory for controllers. 16X1, 16x2, and 20x2 LCDs are among the most popular types of displays that are often linked to the controllers. Which works out to sixteen characters on a single line. The first set has 16 characters on each line while the second set has 20 characters on each line. The use of "smart LCD" displays allows for the visual output of information by many microcontroller devices. Affordable, user-friendly, and capable of producing a readout utilizing the display's 5X7 dots plus cursor, LCD displays built on the LCD NT-C1611 module are a great choice. They use mathematical symbols and the usual ASCII set of characters. The display needs a +5V power and 10 I/O lines (RS, RW, D7, D6, D5, D4, D3, D2, D1, D0) for an 8-bit data bus. The only additional lines needed for a 4-bit data bus are the supply lines and six more (RS, RW, D7, D6, D5, D4). The data lines are tri-state and do not affect the microcontroller's function when the LCD display is disabled.



Figure 6: 2x16 LCD Display

BUZZER

In a magnetic transducer, the circuitry includes an iron core, a yoke plate, a wound coil, a permanent magnet, and a vibrating diaphragm that can be moved. The magnet's field gently draws the diaphragm up nearer the core's surface. A positive alternating current (AC) signal causes the diaphragm to move up and down, which in turn vibrates the air. This is achieved by the current passing through the excitation coil, which forms a fluctuating magnetic field. A resonator, which is composed of a cavity and one or more sound holes, may amplify vibrations in order to generate a loud sound.



ESP8266 Wi-Fi Module

This project revolves on this. Because the project relies on WIFI control of appliances, the module is a crucial part of it. One remarkable feature of this tiny board is the integrated MCU (Micro Controller Unit), which allows for the control of I/O digital pins via a simple programming language that is almost pseudo-code like. Another benefit is that the ESP8266 Arduino compatible module is a low-cost Wi-Fi chip with full TCP/IP capability. The Chinese company Espressif Systems is situated in Shanghai and makes this gadget. In August 2014, this chip made its debut in the ESP-01 version module manufactured by the third-

party company AIThinker. The MCU can establish basic TCP/IP connections and connect to WiFi networks with the help of this little module. He was His tiny size and cheap pricing (1.7–3.5\$) enticed a lot of hackers and geeks to look into it and utilize it for all sorts of projects. Because of its enormous success, Espressif now offers a wide variety of models with varying size and technological specs. Its replacement includes ESP32.

RELAYS:

Industrial controls, automotive systems, and home appliances all make extensive use of electrically controlled switches called relays. By using a relay, two independent voltage sources may be isolated from one another; in other words, a little quantity of voltage or current on one side can manage a big amount of current or voltage on the other side, and vice versa.

Inductor




Fig 7 : Circuit symbol of a relay

DRIVING A RELAY:


Two of the SPDT relay's five pins are used by the magnetic coil, one serves as the common terminal, and the other two are typically closed and normally connected. The coil is activated when a current passes across it. At the beginning, when the coil is deenergized, the usually closed pin and common terminal will be connected. A new connection will be formed between the common terminal and usually open pin when the coil is activated, breaking this connection. Therefore, the relay will be activated whenever the microcontroller sends an input signal to it. You may drive the loads connected between the common terminal and typically open pin while the relay is on. Consequently, the high-current loads are driven by the relay, which receives 5V from the microcontroller. This means the relay may be used as a means of isolation. The microcontroller and digital systems do not have enough current to operate the relay. In contrast to the 10 milliamps required to activate the relay's coil, the microcontroller's pin can only provide 1 or 2 milliamps. This is why the

microcontroller and the relay are separated by a driver, like ULN2003, or a power transistor. By connecting ULN2003 to the relay and microcontroller, it is possible to activate many relays simultaneously.

Bluetooth communication between Devices

One use case is communicating between a smartphone and an HC-05 Bluetooth module; the other is seeing the data from the module on a PC serial terminal.

A Bluetooth terminal app is necessary for data transmission and reception on smartphones in order to connect them to the HC-05 Bluetooth module. Apps for Bluetooth terminals are available in the app stores for both Android and Windows.



Bluetooth Module Serial Interface

Therefore, in order to establish a connection between the HC-05 Bluetooth module and a smartphone, we must first connect the module to a personal computer using a serial to USB converter. We need to pair the HC-05 module with the smartphone before we can set up Bluetooth communication between the two devices.

SOFTWARES

The Arduino platform is an open-source, user-friendly hardware and software environment for prototyping. It is comprised of a programmable circuit board (also called a microcontroller) and an Integrated Development Environment (IDE) called Arduino that is pre-made for writing and uploading code to the physical board. The main characteristics are:

- Many sensors can send signals in digital or analog formats to Arduino boards, which may then be used to activate motors, control LEDs, establish connections to the cloud, and much more.
- The Arduino IDE (also called "uploading software") allows you to command your board's operations by communicating with the microcontroller on the board.

- A separate device, known as a programmer, is not required to load fresh code into an Arduino board, in contrast to most prior programmable circuit boards. The usage of a USB connection is all that is required.
- The Arduino IDE employs a streamlined version of C++, which facilitates programming learning. Last but not least, Arduino offers a standardized form factor that simplifies the microcontroller's tasks.

Now that we know what the Arduino UNO board is and how it works, we can go on to setting up the Arduino IDE. As soon as we figure this out, we can upload our software to the Arduino board.

RESULTS

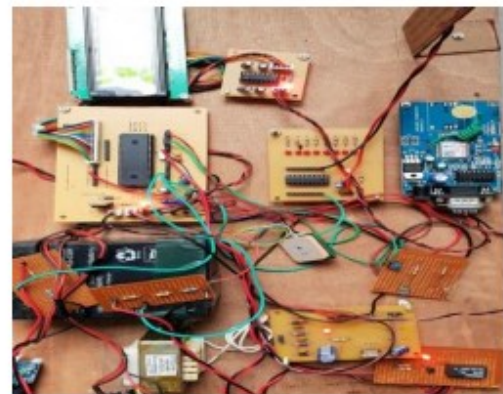


Fig Output

CONCLUSION

Smart houses and buildings may be made much more energy efficient and secure by installing an intelligent lighting and security system that makes use of PIR sensors, LDRs, lights, and buzzers. While the LDR adjusts the brightness depending on the surrounding light, the PIR sensor makes sure the lights turn on only when they're really needed. An essential safety feature, the buzzer sounds an immediate alarm in the event of intruders or dangerous circumstances. The system provides real-time monitoring and remote access through the combination of an Arduino-based controller with IoT connection, making it a highly efficient and cost-effective solution. Taken as a whole, this intelligent system helps with security, cuts down on energy waste, and advances the state of the art in automated settings.

REFERENCES

- [1] P. Hovorov, A. Kindinova and V. Hovorov, "Control of the modes of architectural and artistic lighting systems," 2022 Seventh Junior Conference on Lighting (Lighting), Sozopol,

Bulgaria, 2022, pp. 1-5, doi:
10.1109/Lighting56379.2022.9929010.

[2] Pylyp Hovorov, Mykola Khvorost, Anastasiia Kindinova, "Increasing the Efficiency of Lighting Objects in the Urban Environment", *2023 Eight Junior Conference on Lighting(Lighting)*, pp.1-5, 2023.

[3] S. M. Sali and K. R. Joy, "Intelligent Rover: An IoT Based Smart Surveillance Robotic Car for Military," *2023 2nd International Conference on Computational Systems and Communication (ICCSC)*, Thiruvananthapuram, India, 2023, pp. 1-6, doi:10.1109/ICCSC56913.2023.10143011.

[4] A. G. Menon and M. Prabhakar, "Smart Agriculture Monitoring Rover for Small-Scale Farms in Rural Areas using IoT," *2021 International Conference on Innovative Computing, Intelligent Communication and Smart Electrical Systems (ICSES)*, Chennai, India, 2021, pp. 1-10, doi: 10.1109/ICSES52305.2021.9633976.

[5] V. Kumar, P. Sharma and K. Kamaldeep, "Smart Lighting System Using Arduino," *2021 IEEE 8th Uttar Pradesh Section International Conference on Electrical, Electronics and Computer Engineering (UPCON)*, Dehradun, India, 2021, pp. 1-5, doi:10.1109/UPCON52273.2021.9667610.

[6] S. Sadri and A. Fereidunian, "Design and Development of a Prototype Maquette for Smart Adaptive Street Lighting System," *2022 12th Smart Grid Conference (SGC)*, Kerman, Iran, Islamic Republic of, 2022, pp. 1-5, doi:10.1109/SGC58052.2022.9998962.