



**IJITCE**

**ISSN 2347- 3657**

# **International Journal of Information Technology & Computer Engineering**

[www.ijitce.com](http://www.ijitce.com)



**Email : [ijitce.editor@gmail.com](mailto:ijitce.editor@gmail.com) or [editor@ijitce.com](mailto:editor@ijitce.com)**

## REVIEW OF THE LACK OF WEAR ON THE TURN WITH THE HELP OF MQL

Dr.Zahir Hasan<sup>1</sup>, Mohammed Ahmed Hussain<sup>2</sup>

Professor<sup>1</sup>, Assistant professor<sup>2</sup>

Department Of Mechanical Enginnering

NAWAB SHAH ALAM KHAN COLLEGE OF ENGINNERING & TECHNOLOGY  
NEW MALAKPET , HYDERABAD-500 024

### Abstract

Turning is a technique used to extract unwanted materials from solid steel, with the ultimate goal in mind to achieve its desired size and shape. The finished part can be formed by rotating the working part to experience the auxiliary process, for example, granulating and lapping. The cutting speed used in the turn is very high and dry cutting conditions are commonly used. The output between hard turns is much higher than traditional machining. Standards of strict pollution control on spinning, waste, emissions, well-being and worker production, Company mission & Vision, Expanding companies to reduce refrigerant costs, powerful management, low transfer, discharge standards to reduce oil (MQL) metal-metal appeals. Companies operating worldwide. MQL prepares the way for the transmission of a small measure of liquid cutting in the form of compact air mist between the cutting tool and the workpiece. Thus, it is responsible for that warm age and the chip clearance at the interface between the cutting tool and the workpiece is limited and better by using the MQL method.

**Keywords:** MQL supply system, NDM, Turning process, Carbide cutting tool, Lubricant cutting fluid

### 1. Introduction

To increase tool life, improve machining accuracy and surface finish, cutting fluids are widely used, which can also be used for chip disposal. Now-a-days, it is necessary to use chlorine-free and to target mitigating the consumption of cutting fluids.

For global environmental protection, the use of high-volume cutting fluid increases the cost of disposal of the same ie,waste reducing fluid. Lubricants are widely used to reduce friction and to cool tool-chip and tool workpiece interfaces during the machining process. Also increasing the life of tool,



Fig 1: a) MQL supply with cryogenic




b) MQL supply system

For Manufacturing Spectrum industries, the large amount usage of coolant (lubricant) indicates an increase in the machining cost of the product. In the opinion of some researchers, they found that the cost of cutting the fluid is usually related to the cutting tool. In today's scenario, it is important to consider economic factors (improving production efficiency and energy savings) as well as environmental factors (fluid reductions and reduction of human toxicity and waste) at the same time. Therefore, formulating economic and environmental policies, MQL (minimum volume lubrication) has been achieved and rigorously researched. Removable probes are made near dry machining and dry machining of Minimum Quantity Lubrication (MQL). Researched some impressive results with such technology. Turning is one of the machining processes in which the tool is fixed in the tool holder and requires feed in linear motion to remove the metal and by rotating the work piece at the other end. Turning processes support crosswise on the lathe machine, which is labor intensive as a fast machine tool and can be of four types such as profiling, straight turning, external grooving or taper turning? One kind of such Categories of turning processes can produce different sized materials such as straight, conical, curved or oval shape work pieces. Typically, turning uses simple single point cutting tools. Each group of work piece materials consist the right set of tool angles developed over the years. The equipment should then tighten the work piece material. In the case of hard turning of tungsten, die steel etc., the equipment generates more heat between the interface and the work piece, and we use coolant / lubricant to remove such heat. The use of conventional types of coolant during machining increases the initial cost of the product and this affects the life of the equipment and also reduces the surface finish and Texture.

## I. Literature Review

Fratila and Kaiser [1] explored the processing parameters and the effect of the cooling oil strategy on turning on AISI 1045 upon completion. Tests were performed in dry conditions (dry cutting DC) using the lowest amount of oil (MQL), with the addition of carbide under Serb cooling (FC) conditions. Numerical and graphical improvements prove that the lowest level of cut abundance, the most extreme cutting speed and the greatest coating flow rate result in the superior nature of the machine surface. Gaitonde et al. [5] K10 improved the measurement of MQL by reducing the speed and constant rate between turns of the metal using a carbide tool. Streamlining reveals that MQLs of 200 mL / h, speed reduction of 200 m / min and incentive rates of 0.05 mm / rev are fundamental to reducing the same time-bound surface hardness and especially strength. Getitondet al. [3] the rate increase, incentive rate, and specificity of MQL on matching performance on a metal bend were investigated using K10's molten carbide mechanism. Revealed that the oil measurement has no effect from the machine surface to the complete surface, which in any case increases exponentially with the increase of the incentive rate.

Tai et al. [2] His review considers nine different MQL fluids, their physical 1w properties, wetting, tribal properties (sensitivity and abnormal weight (EP) properties), fog properties and measurable properties, and MQL boring. Run fast to determine the relationship. This proved that low fluid thickness, high fog stabilization, large fog width and high wetting were associated with great machine efficiency. Davim et al. [4] the brass bend was examined with various actions of MQL. Turning was additionally performed with Serge Grease and a test was performed. Among the various parameters examined were nutrition, cutting force, especially cutting force and surface hardness. The review results suggest that with the valid decision of the MQL Framework, the Surge Oil condition can be met. Yazid et al. [4] fewer than three cutting conditions (DRY, MQL 50 mL / h and MQL 100 mL / h) the effect of parameters and matching conditions on surface rebellion is temporarily determined when making inconel conditions 1. Completed the whole process and saw that MQL could expand the concept of Surface with respect to properties.

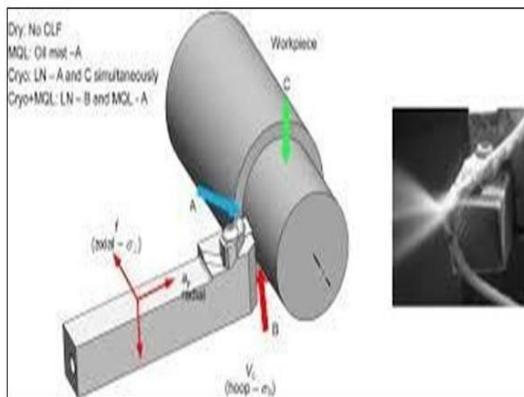

*Fig 2: Feeding Tool Perpendicular to Axis of Work piece.*

Shrijit [8] investigated the effect of various plaster conditions on 19 aluminum amalgam 6061 with carbide tools covered with ornaments. Due to the cutting strength, the rigidity of the machine work surface and the tool wear, the effect of dry machining, at least oil (MQL) and overflow coolant conditions is broken. Despite the increasing maturity characteristics, MQL's position offers another good alternative to high coolant / oil conditions. Had ad& Lubrication [9] introduced another strategy to calculate the normal temperature between the MQL bend and the hot section for equipment, work piece and chip? If the oil is provided only to withstand the fog rake, the temperature of the equipment in the dry turn may be less than 200° C.

Sanchez et al. [10] In the light of the use of crossover minimum lubricant (MQL) he introduced another method in his work to counteract the termination of particulate fluids - low temperature CO<sub>2</sub> framework with reduced oil consumption. The hard corn meal was confirmed by a solid oil layer, which led to a significant change in the life of the crushed wheels and the nature of the machine surface. Although cooling activity was reduced with respect to conventional refrigerant, no heat losses were observed on the work piece.



Fig 3: MQL under Operation


Dudjinski et al. [12] The Unconciliating Decrease focused its thinking on 1QL's MQL machining, reducing refrigerant use and extending the step towards dry machining, along with methods for covering various devices. Kamata and Obikawa [7] incorporated Minimal Amount Oil (MQL) to complete the Inconel- 718 turning process, with three separate cover carbide devices. The three coatings selected are TiCN / Al<sub>2</sub>O<sub>3</sub> / TiN (CVD), TiN / AlN Super Lattice (PVD) and TiAlN (PVD). The TiCN / Al<sub>2</sub>O<sub>3</sub> / TiN cover in MQL cutting showed the best performance, while the TiN / AlN super lattice in MQL cutting showed the second best performance. Satrinari et al.

[13] three inventive nanostructure coatings were created on cutting tools for continuous cutting of minimum-volume lubrication (MQL) or nickel-based super-amalgam under dry conditions. Coatings, TiN + AlTiN, TiN + AlTiN + MoS<sub>2</sub> and CrN + CrN: joined with PVD methods on C + C, WD-Co embedding, nanostructure layers are described as current exhibitions, as research confirmed this facility by two tests and matching. Test. Arunachalam and others participated. [16] The flake stress and surface reliability of the sections were examined as they hardened at the machining (friction) age, using two evaluations of the cover carbide cutting specifically produced for matching HRSAs. In this test, it is recommended to cover round-shaped carbide cutting instrument supplements, chomped bleeding edge planning, negative sort and nozzle sweep (0.8 mm) and refrigerant, which mainly causes compression residual concerns.


Contero et al. [22] both wet and dry cutting conditions were analyzed to complete the turning process of both device incons. From the Trial Investigation, it was observed that the Side Front Line Point (SCEA) device had a strong influence on wear development. As the SCEA display increases, the cutting power of the device decreases. Rahman et al. [15] the condition-reducing effect of the Icon Different1 on machine efficiency has been observed. The continuous abundance of side bleed edge points (SCEAs), cutting pace and bolsters have been tried to reduce the rates of different alloys. Assume that the cutting results SCEA, in addition to slowing down and promoting the rate, are very much involved in determining life. Cost and others. [16] Clothing equipment was invented on the rake and side displays of the changed device grade when completing the operations of INCONEL-718. Low CBN content with soil cover and small grain were found to give the best results. Thakur and others participated. [1] Cutting speed, continuity, cut abundance, as part of cutting parameters such as untreated tungsten carbide and post cryogenic-treated equipment focused on the relationship between work freezing and tool life.

The cryogenic treatment given to tungsten carbide devices caused a huge hangover in instrumental life. Fratila and Kaiser [19] analyzed the temperature variants in the cutting zone under face-processing of Alm3 under conditions of oil-water emulsion (FE), close dry machining (NDM) and dry cutting (DC). Test projections demonstrate cooling and mounting effects in NDM and low cutting temperatures at the instrument chip interface for dry machining. Thakur and others participated. [1] The machinability characteristics of the Inconil Cutting 1 test under dry and minimal oil (MQL) conditions were observed to be due to the use of K20 tungsten carbide cutting tool for strength, surface abrasion and device wear. More than the Inocol 181s matching. Dry condition. Tosun and Hussinog [20] researched the parameters and cooling strategy on the surface roughness of work pieces in the processing of 7075-T6 aluminum alloys. The effect of volumetric convergence of answer for low amount of oil (MQL) has been additionally investigated. Results obtained with the resultant decision in the MQL process.


## II. Results:

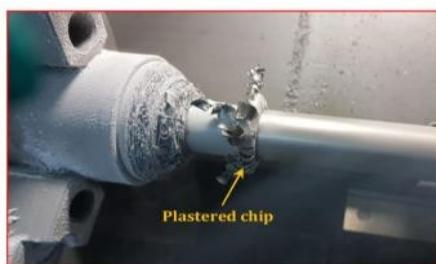

*Fig: Turn Mill*

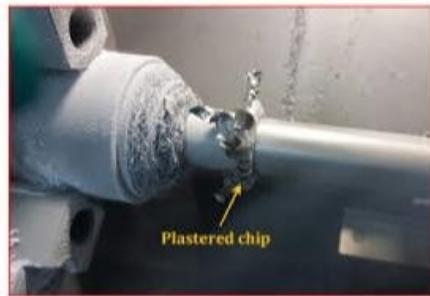
*Fig: Turn mill*

### Growth of Average Principle Flank Wear

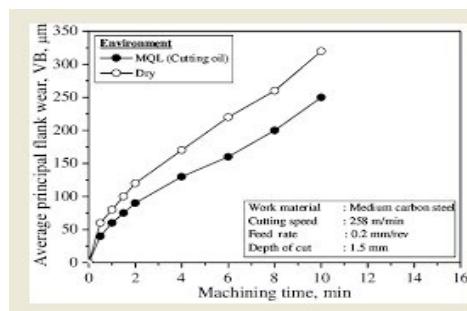

### III. Conclusion

Many researchers have observed that heat is generated between the tool - work piece interface, affecting the surface finish and tool life during rough turns. This inspires the researchers to develop new methods and cutting tools to reduce heat generation by minimizing and optimizing the co-capability of images in chip interfaces. By using the co-efficiency of imagery in device chip interfaces, cutting fluids can be controlled and reduced, which is a traditional option in the manufacturing industry to deal with the heat generated during machining. In addition, the use of large amounts of bits can seriously affect the environment and human health. During its use and disposal, i.e. excessive use of cutting fluids can be avoided. Cryogenic cooling, near dry machining / MQL, pressurized refrigerant, compressed air or) various lubrication methods are applied optimize and reduce the use of excess coolant to eliminate heat production in the chip lubrication tool - chip interface, Resulting in the improved surface finish, better tool life and refrigerant. The rock face of the contour and cutting tool act as a micro reservoir for lubricants. Laser-shaped surfaces for optimized solid lubricants are used to reduce forces, temperature, tool wear and improved surface finishes. Finally, the literature has shown that the study of devices with or without solid lubricants in MQL conditions is a more effective lubrication system than conventional or) Traditional usage of lubricants.

## References

1. Fratila D, Caizar C. *Investigation of the Influence of Process Parameters and Cooling Method on the Surface Quality of AISI-1045 during Turning*. *Journal of Materials and manufacturing Processes*. 2012; 27:1123- 1128.
2. Tai BL, Dasch JM, Shih AJ. *Evaluation and comparison of lubricant properties in minimum quantity lubrication machining*. *International Journal of Machining Science and Technology*. 2011; 15:376-391.
3. Gaitonde VN, Karnik SR, Davim JP. *Optimal MQL and cutting conditions determination for desired surface roughness in turning of brass using genetic algorithms*. *International Journal of Machining Science and Technology*. 2012; 16:304-320.
4. Davim J Paulo, Sreejith PS, Silva J. *Turning of Brasses Using Minimum Quantity of Lubricant (MQL) and Flooded Lubricant Conditions*. *Journal of Materials and manufacturing Processes*. 2007; 22:45-50.
5. Gaitonde VN, Karnik SR, Davim J Paulo. *Selection of optimal MQL and cutting conditions for enhancing machinability in turning of brass*. *Journal of Materials Processing Technology*. 2008; 204:1-3,459-464.
6. Yazid MZA, CheHaron CH, Ghani JA, Ibrahim GA, Said AYM. *Surface integrity of Inconel 718 when finish turning with PVD-coated carbide tool under MQL*. *1st CIRP Conference on Surface Integrity (CSI), Procedia Engineering*. 2011; 19:396-401.
7. Kamata Y, Obikawa T. *High speed MQL finish-turning of Inconel 718 with different coated tools*. *Journal of Materials Processing Technology*. 2007; 192-193:281- 286.
8. Sreejith PS. *Machining of 6061 aluminium alloy with MQL, dry and flooded lubricant conditions*. *Materials Letters*. 2008; 62(2):276-278.
9. Hadad M, Sadeghi B. *Minimum quantity lubrication- MQL turning of AISI 4140 steel alloy*. *Journal of Cleaner Production*. 2013; 54:332-343.
10. Sanchez JA, Pombo I, Alberdi R, Izquierdo B, Ortega N, Plaza S, Martinez Toledano J. *Machining evaluation of a hybrid MQL-CO<sub>2</sub> grinding technology*. *Journal of Cleaner Production*. 2010; 18(18):1840-1849.
11. Obikawa T, Kamata Y, Asano Y, Nakayama K, Otieno AW. *Micro-liter lubrication machining of Inconel 718*. *International Journal of Machine Tools and Manufacture*. 2008; 48(15):1605-1612.
12. Dudzinski D, Devillez A, Moufki A, Larrouquere D, Zerrouki V, Vigneau J. *A review of developments towards dry and high speed machining of Inconel 718 alloy*. *International Journal of Machine Tools and Manufacture*. 2004; 44(4):439-456.
13. Settineri L, Faga M Giulia, Lerga B. *Properties and performances of innovative coated tools for turning inconel 718*. *International Journal of Machine Tools and Manufacture*. 2008; 48(7-8):815-823.
14. Arunachalam RM, Mannan MA, Spowage AC. *Surface integrity when machining age hardened Inconel 718 with coated carbide cutting tools*. *International Journal of Machine Tools and Manufacture*. 2004; 44(14):1481- 1491.
15. Rahman M, Seah WKH, Teo TT. *The machinability of inconel 718*. *Journal of Materials Processing Technology*. 1997; 63(1-3):199-204.
16. Costes JP, Guillet Y, Poulachon G, Dessoly M. *Tool-life and wear mechanisms of CBN tools in machining of Inconel 718*. *International Journal of Machine Tools and Manufacture*. 2007; 47(7-8):1081-1087.
17. Thakur DG, Ramamoorthy B, Vijayaraghavan L. *Influence of minimum quantity lubrication on the high speed turning of aerospace material superalloy Inconel 718*. *International Journal of Machining and Machinability of Materials*. 2013,13(2/3):203.
18. Thakur DG, Ramamoorthy B, Vijayaraghavan L. *Effect of cutting parameters on the degree of work hardening and tool life during high-speed machining of Inconel 718*. *International Journal of Advance Manufacturing Technology*. 2012; 59:483-489.
19. Fratila D, Caizar C. *Assessment of Cooling Effect and Surface Quality to Face Milling of AlMg3 Using Several Cooling Lubrication Methods*. *Journal of Materials and manufacturing Processes*. 2012;27:291-296.
20. Tosun N, Huseyinoglu M. *Effect of MQL on Surface Roughness in Milling of AA7075-T6*. *Journal of Materials and manufacturing Processes*. 2010; 25:793- 79
21. Sun J, Wong YS, Rahman M, Wang ZG, Neo KS, Tan CH, Onozuka H. *Effects of coolant supply methods and cutting conditions on tool life in end milling titanium alloy*. *International Journal of Machining Science and Technology*. 2006; 10:355-370.
22. Cantero JL, Diaz-Alvarez J, Miguelez MH, Marin NC. *Analysis of tool wear patterns in finishing turning of Inconel 718*, *Wear*. 2013,297:885-894.
23. RagulG,NaveenKumarS,KalivarathanG,Jayakumar  
V. Praveen CP, Into Jacob. *An Investigation in Analysis of Dry Turning in MQL Method for Predicting Tool Wear and to Improve Surface Roughness*. *Indian Journal of Science and Technology*. 2016, 9(36).
24. Anuj Kumar Sharma, Rabesh Kumar Singh, Amit Rai Dixit, Arun Kumar Tiwari. *“Characterization and experimental investigation of Al<sub>2</sub>O<sub>3</sub> nanoparticle based cutting fluid in turning of AISI 1040 steel under minimum quantity lubrication (MQL)”* *Materials Today: Proceedings*. 2016; 3:1899-1906.
25. Sunday Albert Lawal, Imtiaz Ahmed Choudhury, Yusoff Nukman. *A critical assessment of lubrication techniques in machining processes: a case for minimum quantity lubrication using vegetable oil-based lubricant*. *Journal of Cleaner Production*. 2013;41:210-221.