



**IJITCE**

**ISSN 2347- 3657**

# **International Journal of**

## **Information Technology & Computer Engineering**

[www.ijitce.com](http://www.ijitce.com)



**Email : [ijitce.editor@gmail.com](mailto:ijitce.editor@gmail.com) or [editor@ijitce.com](mailto:editor@ijitce.com)**

# Taguchi L9 orthogonal array-based Taguchi Multiple Response Optimization of Machining Parameters on Turning of AA 6063 T6 Aluminum Alloy with Grey Relational Analysis.

<sup>1</sup>M PRAVEEN KUMAR

<sup>2</sup>BANTU SAILESH

<sup>3</sup>SK HUSSIAN BASHA

<sup>4</sup>POLAMURI RAMA MOHAN REDDY

## ABSTRACT

*There is a new way to optimising the turning characteristics of aluminium alloy AA 6063 T6 based on I. Taguchi L9 orthogonal array and current research. The tests employ aluminium alloy AA 6063 T6. It is used for turning trials in dry cutting conditions with the uncoated carbide inserts. Optimization of cutting parameters including cutting speed, feed rate, and depth of cut take into consideration both surface roughness (Ra) and the material removal rate (MRR) (MRR). Based on the grey analysis, a grey relational grade (GRG) is created. ANOVA is used to determine whether variables have a significant effect once the optimal number of components has been determined using grey relational grade values. The findings of the exam are verified by doing a follow-up test. This conclusion is supported by the data gathered throughout the research. Increasing the turning process's response time is an option.*

*Taguchi and ANOVA, Grey Relation Analysis, S/N Ratio, Material Removal Rate, and Taguchi Method*

## INTRODUCTION

It has always been challenging for Manufacturing Industries to develop items easily with high quality and high production rates in order to stay competitive in the global market... To produce a particular shape and size, a procedure known as turning is used. This involves rotating pieces that spin the product.

A Lathe machine uses cutting tools to remove the undesired material from the workpiece, allowing us to get the required form. Making a U-turn is critical in the engineering industry. It is a property of surface texture to have a roughness to it. An idealised surface's departures from reality are quantified by measuring the direction of the normal vector's deviations. The top is rough. A smooth surface is one with minimum roughness when these variations are taken into account; this is often referred to as the high

frequency, short wavelength. Surface metrology refers to the measurement of a surface's constituent parts. As a result, industries need a greater material removal rate (MRR) in order to increase their production capacity good quality while keeping a high pace of manufacturing. Cutting speed, feed, and depth of cut may all be increased to get a high MRR. High cutting speeds need additional power, which may exceed the capability of the machine tool. As the parameters of the process rise, it becomes hotter to cut things. When it comes to efficiency, effectiveness, and economy, establishing the right process parameters is critical to success. achieving these aims via the use of machining-based manufacturing (higher MRR and product quality). Cutting speed, feed rate, and other factors are critical in turning. Surface polish, roundness, and MRR are all influenced by the cut's depth.

*Department of Mechanical Engineering,  
Pallavi Engineering College,*

A neural network and experimental design were the primary concerns of Choudhury and Bartarya [5]. The ability to foresee tool wear. With respect to the outputs, we looked at cutting zone temperature and surface polish as well as wear on the flanks as inputs. In the case of turning SCM 440 alloy steel, the Taguchi technique is used to figure out the ideal value of surface roughness. ANOVA (Analysis of Variance) was used to examine the findings of the experiment, which was developed using the Taguchi method[13]. The Taguchi method's orthogonal array paired with three-parameter grey relational analysis to optimise two responses: roughness of surface and removal of material, taking into account speed, depth of cut, and feed rate in terms of precision machining. For the multi-objective features, we used the MINITAB programme to examine the mean impact of Signal-to-Nonsense (S/N) ratio [16]. For each of the many replies, a grey relationship grade is assigned. The Taguchi technique of parameter design has been used to optimise numerous performance parameters, such as surface roughness, roundness, and MRR for turning AA 6063 T6 in this work. Grey relational analysis was also utilised to optimise several response qualities.

## MATERIAL SPECIFICATION

For the AA 6063 T6, the constituents are as follows: 0.6 weight percent Si, 0.34 weight percent Fe, 0.09 weight percent Cu, 0.09% Mn, 0.88% Mg, 0.092 weight centigrammes Cr, 0.095 weight centigrammes Zn, 0.092 weight centigramme Ti and 97.321 weight centigrammes aluminium. Doors, extrusion, window frames, and irrigation tubing are all frequent applications for this metal. The part was machined using a CNC lathe. An uncoated carbide insert tool is utilised. DCGT 11 T3 04 is the cutting tool's model number. Surfcomber SE 1200, Surface profilometer, was used to measure the surface roughness. Dry-cutting conditions were used for the machining.

## EXPERIMENTAL WORK:

Taguchi's L9 orthogonal array was used to build the trials with three parameters and three tiers. Taguchi's approach, a strong tool for experiment design, was utilised to perform the tests. In order to allocate the components selected for the experiment, Taguchi recommends the usage of orthogonal array designs. As a result of a unique design of arrays, Taguchi

experiments may cover a wide range of parameters in a short period of time. This strategy significantly decreases the number of tests necessary to model the response functions compared to the usual experimental methodology. Table(1) displays the factors and parameters that were employed, as well as the values allocated to each. For L9 orthogonal array, the experimental data is shown in Table (2).

## RESULTS AND DISCUSSION

Optimal Multi-Response Planning With GRA, To determine the optimal process parameter settings for a single response characteristic, Taguchi's method is adequate. When there are several replies with varying levels of quality, the best approach is to use GRA to combine them into a single response. It is also possible to use grey analysis to compare two objects. Finite data that seems to be erratic. Because of this, Achievement is made by following GRA processes optimization of wear parameters in a multi-response manner this effort in which  $x_i$  A reference sequence (k) is denoted by  $(k)$ . the  $i$ th experiment's pre-processing and your Mean of the original sequence is shown.responses.

### C. Computation of Grey Relational Coefficient and Grade

After normalising the sequence, the next step is to determine the reference sequence's deviation sequence. using Equation (2) as a guide:

$$0i(k) = |x_0 - x_i| \text{ is the solution.} * k x_i$$

\* Is it right,  $k$ ) (2) where  $x_0 = 0i(k)$

\*  $x_i(k)$

K denotes the deviation, reference, and comparability sequences. Equation (3): table is used to calculate the grey relational coefficient (GRC) (3). That experiment 2's control parameter setting had a higher grey relational grade suggests that it was the best setting for both MRR and surface roughness among the nine selected trials, according to table(2). Since we're aiming for greater numerous performance characteristics, we looked at the bigger, better S/N quality characteristics for the grey relational grade. The S/N ratio of a parameter's value is what determines its optimal setting. As a result, N1f2d2 was chosen as the ideal process parameter setting for

numerous performance criteria. D. Taguchi Method S/N Ratios In order to decrease process variability and improve the parameters, Taguchi employs orthogonal arrays as a part of his technique. The performance indicator is the signal-to-noise (S/N) ratio a feature of the Taguchi technique for process evaluation the degree to which actual results deviate from expectations The Analyzing the S/N ratio means calculating a logarithmic function as determined by dividing the signal by the noise To reduce the volume of background noise and the resulting damage, greater S/N ratios are a result of uncontrolled variables. preferred. The higher the S/N ratio, the better the results.

the product's quality. Three kinds of S/N exist. Higher is better; nominal is better; and so on. Therefore, as demonstrated in Equations (6)(8), the smaller the better:

$$\left(\frac{S}{N}\right)_{HTB} = -10 * \log_{10} \left( \frac{1}{n} \sum_{i=1}^n \frac{1}{y_i^2} \right)$$

$$\left(\frac{S}{N}\right)_{NTB} = -10 * \log_{10} \left( \frac{1}{n} \sum_{i=1}^n y_i^2 \right)$$

$$\left(\frac{S}{N}\right)_{STB} = -10 * \log_{10} \left( \frac{1}{n} \sum_{i=1}^n y_i^2 \right)$$

#### Grade

This step follows normalising the sequence and finding the deviation sequence for the reference sequence. to follow the example of Equation (2)

The answer is  $0i(k) = |x0|$ .

\*In Chinese, it is written as:

\*K) Is it correct? (2) This has the following equation: where  $x0=0i(k)$

\* infinity plus one (k)

\* K is the abbreviation for deviation, reference, and comparison. The grey relational coefficient (GRC) is calculated using equation (3): (3). It seems from table that experiment 2's control parameter setting had the highest grey relational grade, indicating that it was the best option for both MRR and surface roughness among the nine experiments examined (2). Due to our need for increased performance diversity, we examined the grey relational grade's larger and better S/N quality features. The S/N ratio of a parameter's value determines its ideal setting. Thus, across a wide range of performance criteria, N1f2d2 was selected as the optimal process parameter setting. The

Taguchi D. Method is an example of this. Analyses of S/N Ratio In order to enhance the parameters and reduce the unpredictability of the process, As part of Taguchi's method, orthogonal arrays are used. The The signal-to-noise (S/N) ratio is a performance metric. a characteristic of Taguchi's process assessment method when actual findings differ significantly from what was expected The It is necessary to use a logarithmic function to analyse the S/N ratio. by dividing the signal by the background noise To lessen the harm caused by background noise, it is necessary to use noise-cancelling headphones. The higher S/N ratios may be attributed to the presence of uncontrollable factors. preferred. Results are better when the S/N ratio is larger. the standard of a certain product. There are three types of S/N.The higher the number, the better.

As seen in Equations (6) and (8), the smaller the better.

#### G. Graphs

1) Normal Probability Plot When the distribution is normal, a graph is drawn of the residuals compared to their predicted values. The distribution of the analysis residuals should be consistent. Moderate deviations from normality do not have a significant impact on the outcomes of balanced or nearly balanced designs or data sets with a high number of observations. There should be a straight line on the normal probability plot of the residuals. This may be seen in Figure 3.

There are two ways to look at it: The residuals and fitted values are shown on a graph. Randomly distributed residuals should be found around zero. Refer to Figure 4. H. GRG Confirmation Experiment Results: The goal of this experiment is to check if the quality of the product has improved. The following equation may be used to predict the optimum reaction once the ideal level has been determined: In this equation, the mean S/N ratio at an ideal level (0) equals the overall mean S/N ratio, and the number n represents the number of primary design factors that have an impact on quality attributes (i.e., 0 is the optimal S/N ratio). A value of 0.7184 is predicted by Eq (9) for an ideal combination of parameters (N1-f2-d2), according to the grey relational grade (GRG). This was followed by an experiment in which the best possible combination of parameters was used for testing purposes (N1-f2-d2). In the dining room, a table is (7). Multiple performance characteristics (GRG) are shown in contrast to the real one. The confirmation experiment's grey relational grade was

determined to be 0.7640. Cutting settings at two distinct levels—Initial and Optimal Cutting—were used in the confirmation experiment. The first experiment condition is N1f1d1, and the ideal process parameter setting for the numerous performance characteristics is N1f2d2. These are the parameters used to determine the first cutting parameters. Using the calculated various performance parameters, the Prediction value of GRG and S/N ratio are 0.7184 and -2.76601 respectively with reduced spindle speed, lower feed rate, and medium depth of cut of 0.15 mm (GRG). In N1f2d2 parameter setting, the experimental GRG and S/N ratios are 0.7640 and -2.4271 respectively. Multiple performance parameters in the confirmation experiments have an error rate between prediction and experimentation that is approximately exactly 5.96 percent. As a result, a confirmation experiment has confirmed the improvement in quality features.  $5.229 - 2.4271 = 2.8019$  dB for GRG is the difference between the initial cutting parameters and the ideal cutting parameters used to compute the increase in S/N ratio.

### Figures and Tables:

TABLE I. MACHINING PARAMETERS

Machining Parameters					
Sno	Factors	Symbol	Level 1	Level 2	Level 3
1	Spindle Speed (rpm)	N	2000	3500	5000
2	Feed Rate (mm/rev)	F	0.05	0.075	0.1
3	Depth of Cut (mm)	D	0.1	0.15	0.2

TABLE II. DESIGN OF EXPERIMENTS

Design of Experiments					
Sno	N	F	d	Ra	MRR
1	2000	0.05	0.1	0.380	0.2123
2	2000	0.075	0.15	0.360	0.4302
3	2000	0.1	0.2	0.535	0.6872
4	3500	0.05	0.15	0.388	0.3865
5	3500	0.075	0.2	0.509	0.6872
6	3500	0.1	0.1	0.533	0.5208
7	5000	0.05	0.2	0.459	0.5821
8	5000	0.075	0.1	0.469	0.4899
9	5000	0.1	0.15	0.556	0.8531

Exp. No.	Normalization		Deviation Sequence		Grey Relational Coefficient -GRC	Grey Relational Grade -GRG	Rank Order
	Ra	MRR	Ra	MRR			
1	0.89796	0.00000	0.10204	1.00000	0.83051	0.33333	0.58192 4
2	1.00000	0.34004	0.00000	0.65996	1.00000	0.43105	0.71553 1
3	0.10714	0.74110	0.89286	0.25890	0.35897	0.65885	0.50891 7
4	0.85714	0.27185	0.14286	0.72815	0.77778	0.40712	0.59245 3
5	0.23980	0.74110	0.76020	0.25890	0.39676	0.65885	0.52781 5
6	0.11735	0.48143	0.88265	0.51857	0.36162	0.49088	0.42625 9
7	0.49490	0.57709	0.50510	0.42291	0.49746	0.54177	0.51961 6
8	0.44388	0.43321	0.55612	0.56679	0.47343	0.46870	0.47106 8
9	0.00000	1.00000	1.00000	0.00000	0.33333	1.00000	0.66667 2

TABLE IV. RESPONSE TABLE FOR MEANS

Level	Initial Cutting Parameters		Optimal Cutting Parameters	
	N1f1d1		N1f2d2	
	Prediction	Experiment	Prediction	Experiment
GRG	0.5819	0.7184	0.7640	0.7640
S/N Ratio	-5.229	-2.76601	-2.4271	-2.4271

Average mean = 0.55669 TABLE V. RESPONSE TABLE FOR S/N RATIOS Larger is better

Level	N	F	D
1	0.6021	0.5647	0.4931
2	0.5155	0.5715	0.6582
3	0.5524	0.5339	0.5188
<b>Delta</b>	0.0866	0.0375	0.1651
<b>Rank</b>	2	3	1

TABLE VII

Source	D F	Adj SS	Adj MS	F-Value	P-Value	Percentage Contribution(%)
N	2	0.011335	0.005667	1.63	0.0381	16.65
F	2	0.002398	0.001199	0.34	0.0744	3.52
D	2	0.047372	0.023686	6.79	0.0128	69.58
Error	2	0.006972	0.003486			
Total	8	0.068076				

## CONCLUSION

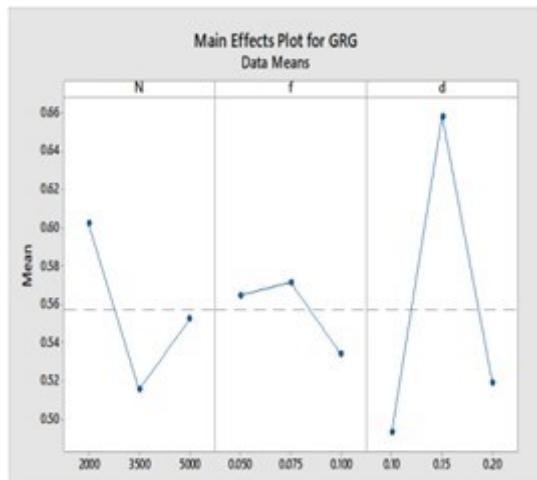


Fig 1: Mean Effect plot for GRG

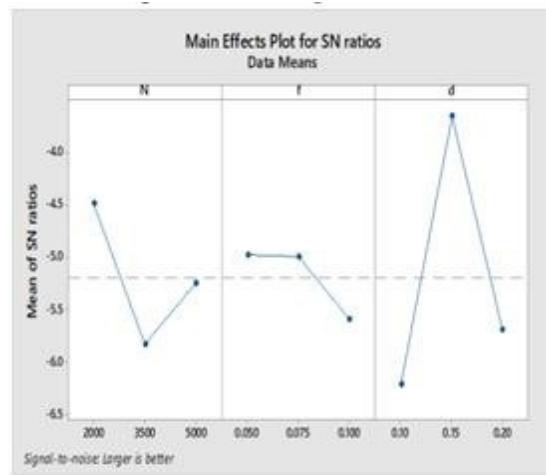


Fig 2 : Main Effects plot for SN ratios Data means

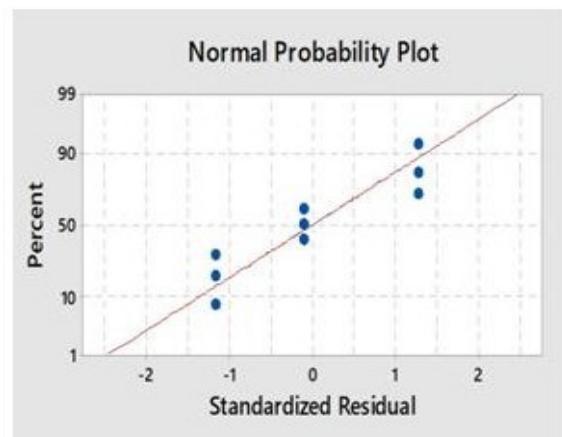


Fig 3:Normal Probability Plot

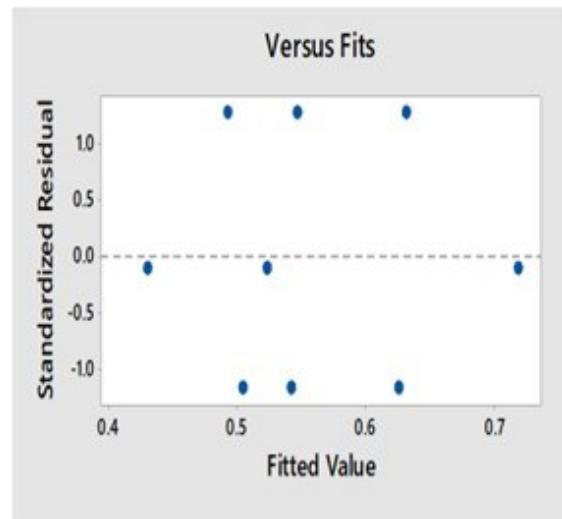


Fig 4: Versus Fits

The surface roughness ( $R_a$ ) and material removal rate (MRR) were measured under different cutting conditions for diverse combinations of machining parameters. The conclusions arrived, at the end of this work are as follows: 1. From this analysis, it is revealed that depth of cut and spindle speeds are prominent factors that affect the turning of aluminum alloy. The depth of cut ( $p=69.58\%$ ) is the most influencing factor in determining the multiple performance characteristics or grey relational grade (GRG) followed by spindle speed ( $p=16.65\%$ ) and feed rate ( $p=3.52\%$ ). 2. The best multiple performance characteristics were obtained with an uncoated carbide insert when turning aluminum alloy with the lower spindle speed of 2000 rpm, lower feed rate of 0.05 mm/rev, and medium depth of cut of 0.15 mm with the estimated multiple performance characteristics (GRG) of 0.7184. The experimental value of GRG for this combination of parameters is 0.7640. 3. The percentage of error between the predicted and experimental values of the multiple performance characteristics during the confirmation experiments is almost within 5.96%. 4. The improvement in the S/N ratio from the initial cutting parameters to the optimal cutting parameters is 2.8019 dB for GRG. 5. The value of multiple performance characteristics obtained from the confirmation experiment is within the 95% confidence interval of the predicted optimum condition.

## REFERENCES

[1]. Zhou Q., Hong G. S., and Rahman M., "A New Tool Life Criterion For Tool Condition Monitoring Using a Neural Network", *Engineering Application Artificial Intelligence*, Volume 8, Number 5, pp. 579-588.

[2]. Lin W. S., Lee B. Y., Wu C. L., (2001), "Modelling the surface roughness and cutting force for turning", *Journal of Materials Processing Technology*, Volume 108, pp. 286- 293.

[3]. Suresh P. V. S., Rao P. V., and Deshmukh S. G., (2002), "A genetic algorithmic approach for optimization of surface roughness prediction model", *International Journal of Machine Tools and Manufacture*, Volume 42, pp. 675-680.

[4]. Lee S. S. and Chen J. C., (2003), "Online surface roughness recognition system using artificial neural networks system in turning operations" *International Journal of Advanced Manufacturing Technology*, Volume 22, pp. 498-509.

[5]. Choudhury S. K. and Bartarya G., (2003), "Role of temperature and surface finish in predicting tool wear using neural network and design of experiments", *International Journal of Machine Tools and Manufacture*, Volume 43, pp. 747- 753.

[6]. Chien W.-T. and Tsai C.-S., (2003), "The investigation on the prediction of tool wear and the determination of optimum cutting conditions in machining 17-4PH stainless steel", *Journal of Materials Processing Technology*, Volume 140, pp. 340-345.

[7]. Özel T. and Karpat Y., (2005), "Predictive modeling of surface roughness and tool wear in hard turning using regression and neural networks", *International Journal of Machine Tools and Manufacture*, Volume 45, pp. 467- 479.

[8]. Kohli A. and Dixit U. S., (2005), "A neuralnetwork-based methodology for the prediction of surface roughness in a turning process", *International Journal of Advanced Manufacturing Technology*, Volume 25, pp. 118-129.

[9]. Ahmed S. G., (2006), "Development of a Prediction Model for Surface Roughness in Finish Turning of Aluminum", *Sudan Engineering Society Journal*, Volume 52, Number 45, pp. 1-5. 3.

[10]. Abburi N. R. and Dixit U. S., (2006), "A knowledge-based system for the prediction of surface roughness in turning process" *Robotics and ComputerIntegrated Manufacturing*, Volume 22, pp. 363-372.

[11]. Zhong Z. W., Khoo L. P., and Han S. T., (2006), "Prediction of surface roughness of turned surfaces using neural networks", *International Journal of Advanced Manufacturing Technology*, Volume 28, pp. 688-693.

[12]. Kumanan S., Saheb S. K. N., and Jesuthanam C. P., (2006), "Prediction of Machining Forces using Neural Networks Trained by a Genetic Algorithm", *Institution of Engineers (India) Journal*, Volume 87, pp. 11-15.

[13]. Thamizhmani S., Saparudin S., and Hasan S., (2007), "Analysis of Surface Roughness by Using Taguchi Method", *Achievements in Materials and Manufacturing Engineering*, Volume 20, Issue 1-2, pp. 503-505.

[14]. Natarajan U., Arun P., Periasamy V. M., (2007), "On-line Tool Wear Monitoring in Turning by Hidden Markov Model (HMM)" *Institution of Engineers (India) Journal (PR)*, Volume 87, pp. 31-35.

[15]. Özel T., Karpat Y., Figueira L., and Davim J. P., (2007), "Modeling of surface finish and tool flank wear in turning of AISI D2 steel with ceramic wiper inserts", *Journal of Materials Processing Technology*, Volume 189, pp. 192- 198.

[16]. Wang M. Y. and Lan T. S., (2008), "Parametric Optimization on Multi-Objective Precision Turning Using Grey Relational Analysis". *Information Technology Journal*, Volume 7, pp. 1072-1076.

[17]. Sahoo P., Barman T. K., and Routara B. C., (2008), "Taguchi based practical dimension modeling and optimization in CNC turning", *Advance in Production Engineering and Management*, Volume 3, Number 4, pp. 205- 217.

[18]. Reddy B. S., Padmanabhan G., and Reddy K. V. K., (2008), "Surface Roughness Prediction Techniques for CNC turning", *Asian Journal of Scientific Research*, Volume 1, Number 3, pp. 256-264.

[19]. Wannas A. A., (2008), "RBFNN Model for Prediction Recognition of Tool Wear in Hard Turning", *Journal of Engineering and Applies Science*, Volume 3, Number 10, pp. 780-785.

[20]. Fu P. and Hope A. D., (2008), "A Hybrid Pattern Recognition Architecture for Cutting Tool Condition Monitoring" *Technology and Applications*, Volume 24, Number 4, pp. 548- 558.

[21]. Shetty R., Pai R., Kamath V., and Rao S. S., (2008), "Study on Surface Roughness Minimization in Turning of DRACs using Surface Roughness Methodology and Taguchi under Pressured Steam Jet Approach", ARPN Journal of Engineering and Applied Sciences, Volume 3, Number 1, pp. 59-67.