



IJITCE

ISSN 2347- 3657

International Journal of Information Technology & Computer Engineering

www.ijitce.com



Email : ijitce.editor@gmail.com or editor@ijitce.com

Zigbee-Based Automatic Phase Changer Based on Microcontroller

Suma G C, Vidhya B, S Prakasha

Asst. Prof, Asst. Prof, Asst. Prof & HOD

sumasavita@gmail.com, vidhyab.rymcc@gmail.com, prakashshanbog@gmail.com

Department of EEE, Proudhavevaraya Institute of Technology, Abheraj Baldota Rd, Indiranagar,

Abstract

Hosapete, Karnataka-583225

To keep up with the ever-changing demands of today's world, every system is now fully automated. Because of the reduced need for human intervention and the increased precision and reliability of automated systems, these control systems are in great demand across all industries. Exceptional performance is the duty of automated systems, especially in the electrical and electronics area. The electrical industry now uses a manual process to switch from one phase (three phases) to another (single phase). I would want to automate the transition from three phases to one phase in the event that the voltage in any two of them drops too low. So, we came up with a solution: a system that uses wireless technology to monitor and alter phases, thereby solving the issue. The article Automatic phase change and monitoring based on embedded systems employing ZIGBEE ensures security, delivers excellent dependability, and is prone to many errors. The system employs a microprocessor to manage its transmitter and reception sections. The ZIGBEE transmitter and receiver portions communicate with one other. On the computer, you may see the current monitoring phase. Automatically convert a three-phase system to a single-phase one if voltage drops below a certain threshold in any two of the phases.

I. INTRODUCCION

In 21st century, world is full of automation and it is the instance we should consider of microcontroller to manage. All automatic controllers like remote controller, handheld communication devices, automatic and semi-automatic machine, automobile signifying and measuring instruments have automation application. The project described at this time being also a microcontroller based embedded used for automatic phase changer. In this project, microcontroller is used to accumulate the data, process data and change data according to the user requirement. There are different types of microcontroller offered in market. The examples are Intel MCS-8051, PIC16

Family by microchip, Atmel 89cxx, 89cxx51. The microcontroller make use of this project is PIC16F877A. Now a day, several times out of three phases one of the phase cuts off manually. The day to day life of human being, the circumstances which occur due to power instability issues we decided to design such a system which would overcome this issue eventually and aid to reduce human efforts too. Secondly in order to overcome the various phase change issue and avoid damages. We can change the phase automatically and monitor the present phase electrical line through wireless sensor networks (WSN) provide self organization and local processing capability and will be displayed in PC (own Computer). ZIGBEE network is used at this point. These permit the configuration of a great network of sensors in different industrial segments. In evaluation with the other standards such as WI-FI and Bluetooth, the ZIGBEE standard has advantages related to power consumption, low cost and scalability. In our project, low voltage of phase is varied through potentiometer and then the results are displayed in LCD (Liquid Crystal Display).

II. EXISTING SYSTEM

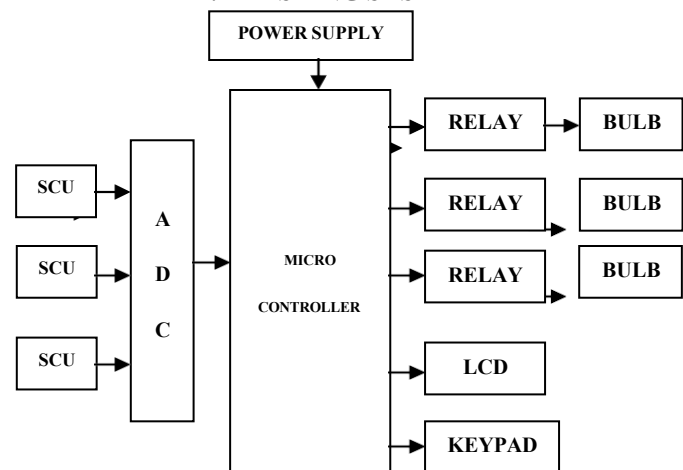


Fig 1: block diagram for existing system

In our daily life our focus was to modify the system which can minimize the circumstances in person life. So our thought of automatic phase changer was selected. This can be used in three phase application. In three phases equipments, if supply voltage is low in any one of the phase and you if you wish to run all the equipment properly. This equipment will assist you to save this situation. Still proper rating fuse need to be used in three phases i.e. R, Y, and B inputs lines. There the proper voltage is available that time. Other low voltage phase moves to correct voltage in equal manner, to run all the tools on the single phase in the building. The circuit consist of relay comparator, transformer.

III. PROPOSED SYSTEM

In our proposed a system, if there is short voltage in any two phases of three phases supply and want to change over the phase from three phases into single phase automatically. Our system used to monitor and change over the phase by using wireless technology. The automatic phase change and monitor the present phase electrical line through wireless sensor networks provide self organization and local processing capability and will be displayed in Personal Computer. The communications between transmitter and receiver section in the system are made by ZIGBEE transmitter and receiver. The present monitored phase is displayed in PC. MATLAB code is used to create Graphical user interface application in our personal computer. It is used to display the present phase in electrical line on laptop or computer and we can change the phase by using this GUI and ZIGBEE.

IV. WORKING PRINCIPLE

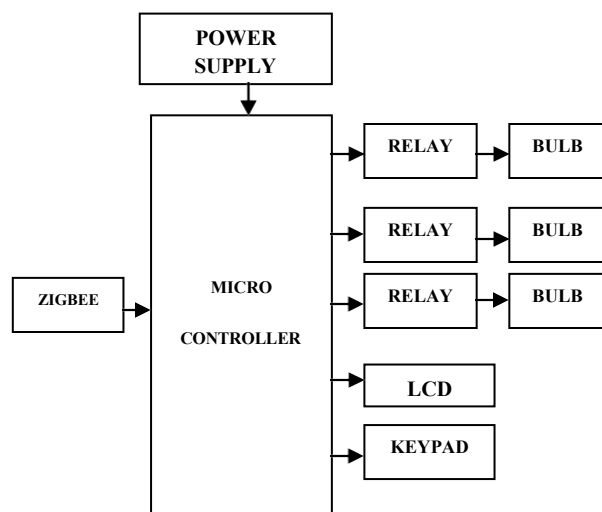


Fig 2: block diagram for proposed system




Fig 3: block diagram for proposed system

There are three different inputs & each phase has different transformers. Step down transformer used to decrease the voltage from 230v to 12v. Pot is used as a voltage divider which is given to ADC so that the voltage limit should be 0 to 5v. All three phases are same but we can vary the calibration by using the Pot. The ZIGBEE is used to wireless monitoring the phase present in the system and provide control signal to the microcontroller. In our system, Two ZIGBEE is used for Wireless communication. One ZIGBEE connect on hardware and other one is connected with PIC microcontroller's Transmitter/Receiver pin. Another ZIGBEE is connected to computer using USB cable.

When any parameter received by ZIGBEE goes beyond set value. MATLAB software used to monitor the phase present in electrical line. GUI (Graphical user interface) is created by using MATLAB code. which is given to microcontroller and then microcontroller decides whether which phase is off & it is display on LCD. The present monitored phase is displayed in PC.

V. HARDWARE DESCRIPTION

A. Power supply

The major function of a power supply is used to convert the ac voltage from step down transformer to dc voltage by using bridge rectifier circuit. The voltage regulator gives regulated 5v and 12v to the microcontroller and relay. This consist step down transformer, bridge rectifier, and voltage regulator.

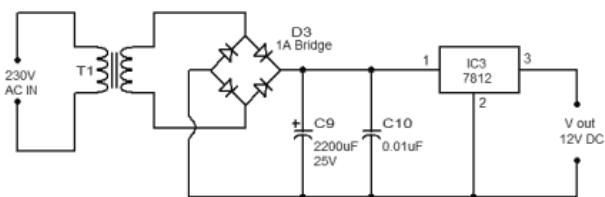


Fig 4: Circuit Diagram of Power Supply

B. Pic microcontroller

The PIC16F877A is one of the latest products from Microchip. The PIC primarily referred to peripheral interface controller. Then it is called programmable intelligent computer

The PIC microcontroller has 40 Pin. In which 33 pins are GPIO Pin. The GPIO pins are divided into 5 Port. They are Port A, Port B, Port C, Port D and Port

E. the oscillator frequency of PIC microcontroller is 0-20 Mhz. The operating voltage of PIC microcontroller is 5v dc. They have inbuilt hardware like I2C, SPI etc.

The 16F7877A is a capable microcontroller that can do many tasks because it has large programmable memory 8K in words and 365 Bytes of RAM. This is enough memory to do all the programs in different projects. The main advantage of the microcontroller is easy to write and erase as many times as possible because it use FLASH memory technology.

C. Lcd display

LCD is used to display the phase present in the system. In our system two 2x16 LCD is used. In which two rows and 16 characters per row we can display. 16 pins are presented in the LCD display. They divided into three categories they are power supply pin, control pin, data pin.

It is an electronic display module and finds a wide range of applications. A 16x2 LCD display is a very basic module and it is very commonly used in various devices and circuits. These are preferred in seven segments.

LCD are easily programmable, it is economical and no limitations for display. It has two registers command and data. The command instructions store command instructions given to an LCD. The data register stores the data to be displayed in LCD. The ASCII value is to be displayed in a screen.



Fig 5: Schematic view of 16 x 2 LCD display

D. Uart

UART is universal asynchronous receiver and transmitter. That is a part of computer hardware. This is used to data transmission from computer to the microcontroller. A UART is inbuilt into the PIC16F877A microcontroller. A UART is usually an individual (or part of an) integrated circuit used for serial communications over a computer or peripheral device serial port.

E. Max 232

The MAX232 is a 16 pin integrated circuit, first formed by (MIP) Maxim Integrated Products. This is used to stabilize the voltage insaturation to the computer and microcontroller. which act as a voltage stabilizer.

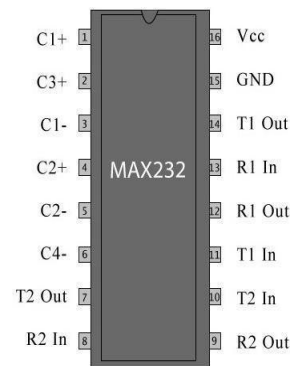


Fig 6: Pin diagram of MAX232

Applications

- Communicating with a PCs serial interface
- Serial communication
- Used to provide data transfer between any transmitters to system
- It also supports RTS, CTS mechanism.

F. Zigbee transceiver

ZIGBEE is a requirement of a set of high level communication procedure using small, short power digital radios based on the IEEE 802.15.4-2003 standard for wireless personal area networks. The ZIGBEE standard has advantages related to energy consumption, low cost and scalability.

G. Relay

A relay is a electromagnetic switch. Operating voltage of relay is 12v dc. The coil and switched contact is present in the relay inner part. The current flow through the coil whenever the electromagnetic force generated around the coil. By using this EMF contact is tripper from normally closed to the normally open.

VI. RESULT

A. Hardware output

The phase can be changed automatically and monitor the present phase line in LCD.



Fig 7: hardware output result

VII. CONCLUSION

This leads us to the suggested solution, which is a wirelessly operated ZIGBEE-based automated phase changer. To switch phases when low voltage is detected in any phase state, a relay driver unit is used. The findings are shown on an LCD (Liquid Crystal Display) after adjusting the low voltage of phase using a

potentiometer. There is superior security, high dependability, and a high likelihood of numerous problems due to the system's architecture. For the phase monitoring and change over the phase, the software simulations are executed using MATLAB and the Proteus 8 program.

REFERENCES

- [1] Fang Duan and Rastko Zivanovic. Condition Monitoring of an Induction Motor Stator Windings via Global Optimization based on the Hyperbolic Cross Points. IEEE Transactions on Industrial Electronics, Vol 62, No.3, March 2015
- [2] R.R Patil, T.N Date and B.E Khushare. Zigbee Based Parameter Monitoring System for Induction Motor, IEEE Students Conference on Electrical, Electronics & Computer Science. Bhopal, March 2014.
- [3] Arun Nadh and Lakshmi Praba.N. Automatic Speed and Torque Monitoring in Induction ting, Motors using Zigbee and SMS. International Conference on Emerging Trends in Computing, Communication & Nanotechnology, Tirunelveli, March 2013.
- [4] Abel C. Lima-Filho, Ruan D. Gomes, Marceu O. Adissi, Tassio Alessandro Borges da Silva, Francisco A. Belo and Marco A. Spohn, "Embedded system Integrated into a wireless sensor network for online dynamic torque and efficiency monitoring in induction motors," IEEE/ASME Transactions on Mechatronics, vol. 17, No. 3, June 2012.
- [5] The ZigBee protocol Alliance, Zigbee Specification, <http://www.zigbee.org>, June 2005. Madhavi L. Mhaisgawali, "Induction Motor Speed Control using PID Controller," International Journal of Technology and Engineering Science., vol. 1(2), pp 151-155., Jan 2012.
- [6] Nuno D. Simoes, Joao L. Goncalves, Maria L. Caeiro, Miguel J. Boavida, Fillipe D. Cardosco, a "ZigBee/GPS Tracking System for Rowing Races," a International Conference on Advances in Mobile Computing and Multimedia, Paris, France, Nov. 2010.
- [7] Ramazan Bayindir, Ibrahim Sefa, Ilhami Colak, Aslin Bektas, "Fault Detection and Protection of Induction Motors Using Sensors," IEEE Transactions on Energy Conversion, vol. 23, No. 3, September 2008.